



Stampanti Serie SA



Modello di punta della casa, è la macchina per grandi volumi di stampa.

Il display grafico ad alta risoluzione retroilluminato in unione ad un Navipad intuitivo, permettono una facile programmazione delle varie funzioni, nonché la massima interattività con i layout memorizzati all'interno della Flash Card, in grado di contenere fin ad 1 Gb di informazioni.

La memoria interna di 64 Mbyte, con ben 8 Mb di memoria flash, ed un innovativo processore a 266 Mhz, le consentono prestazioni da primato assoluto.

SA nasce completa di tutte le interfacce principalmente utilizzate, quali RS232, USB, Ethernet e Slot PCMCIA e dispone inoltre di driver per Mac OS X (Power PC - Intel).

La sua meccanica di precisione montata su cuscinetti a bassa manutenzione la rendono adatta a lavori gravosi, anche su tre turni ed in ambienti difficili, dove è disponibile in opzione il coperchio in versione metallica.



Opzione: Taglierina



Opzione: Spellicolatore

The fast allrounder material width up to 120 mm

Printing method	Thermal transfer / Thermal direct		
	203	300	600
Print resolution dpi	250/200	250/150	100
Print speed up to mm/s	104	105.6/108.4	105.6
Print width up to mm			



SA4
200/300/600 Dpi

The broad material width up to 180 mm

Printing method	Thermal transfer / Thermal direct	
	300	200
Print resolution dpi		
Print speed up to mm/s		
Print width up to mm	162.6	





SA6

The extra broad material width up to 235 mm

Printing method	Thermal transfer / Thermal direct	
	300	150
Print resolution dpi		
Print speed up to mm/s		
Print width up to mm	216	



SA8

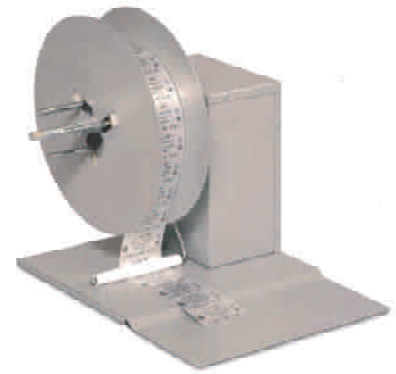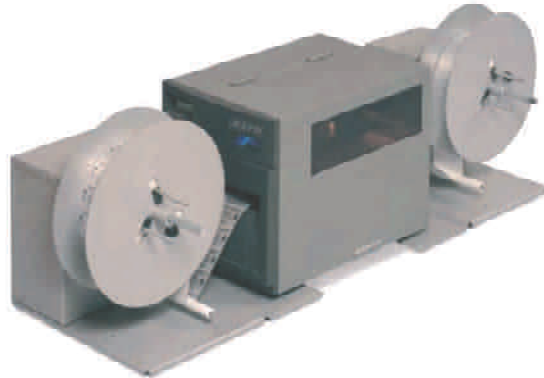

1. Printhead	SA4	SA4.3	SA6	SA8
Printing method	Thermal transfer / Thermal direct			
Print resolution dpi	203	300	300	300
Print speed up to mm/s	250	100	200	150
Print width mm	104	105.6	108.4	216
2. Labels				
Material: Labels, continuous rolls or fan-folded	thermal and standard paper, cardboard, textile, plastic foils PE, PP, PVC, PA, PI			
Material thickness mm / weight g/m ²	0.055 - 0.8 / 60 - 250			
Media roll: Total diameter up to mm	210			
Core diameter mm	38 - 100			
Winding direction	inside or outside			
Width of carrier or of continuous material mm	25 - 120		50 - 180	50 - 235
Label width mm	4 - 116		50 - 176	50 - 220
Label height min. mm	4 - 1000		6 - 1000	10 - 1000
Label height when dispensing ²⁾ min. mm	12 - 200		25 - 200	-
3. Ribbon				
Ink	inside or outside			
Roll diameter up to mm	80			
Core diameter mm	25			
Ribbon length variable up to m	500			
Width up to mm	114		165	220
4. Internal re-winder (only Peel-off version)				
Total diameter up to mm	145			
Core diameter mm	38.1			
Winding direction	only outside			
5. Dimensions printer				
Height x Depth mm	274 x 446			
Width mm	242		302	352
Weight kg	9		13	15
6. Label sensor				
Reflective sensor for „End of material“, „Label margin“ and „Punching mark“. Reflective sensor from below for printer's imprint. (See through/Reflective sensor from) below, adjustable mm	5 - 53			
7. Electronics				
Processor high speed 32 Bit ColdFire/Taktrate MHz	266			
(RAM) MB	64			
(ROM) MB Flash	8			
Slot for memory CompactFlash-card Type I up to 1 GB	■			
Slot for memory card Cardbus / PC-Card Type II	■			
Real time clock, print-ad out of time and date	■			
8. Operation panel				
Buttons illuminated, depending on mode of operation	Pause, Feed, Cancel, Menu, Enter, 4 x Cursor			
LCD graphic display Width x Height in mm	60 x 40			
lines/characters	4 / about 20			
9. Interfaces				
Parallel Centronics bi-directional acc. IEEE 1284	□			
Serial RS 232 C 1.200 up to 230.400 Baud/8 Bit	■			
USB 2.0 High Speed Slave for PC-connection	■			
Ethernet 10/100 Base T, LPD, RawIP-Printing, ftp-Printing, DHCP, HTTP, FTP, SMTP, SNMP, NTP, Zeroconf, mDNS	■			
RS 422, RS 485 1,200 up to 230,400 Baud/8 Bit	□			
Peripheral connection	■			
WLAN card 802.11b/g	□			
USB Master for keyboard and scanner	2x ■			

■ Standard □ Option

I NOSTRI PRODOTTI E SERVIZI

MACCHINE PER CONFEZIONAMENTO E FINE LINEA



MATERIALI DI CONSUMO



CONTENITORI E PANGALI INDUSTRIALI E AGROALIMENTARI



PROGETTAZIONE, LINEE COMPLETE, ASSISTENZA



SINTESI SRL

Sede Legale e Ufficio:

Via F. Lippi, 22/E - 50038 Scarperia (FI) Tel. 055 8430571 - Fax 055 846646

Sede Operativa e Magazzino:

Via Giovanni XXIII, 49 - Loc. Soterana - 50032 Borgo San Lorenzo (FI)

- www.sintesicom.it - sintesi@sintesicom.it -